

HF/50 MHz 1 kW LINEAR AMPLIFIER



Industry First Digital Pre-Distortion (DPD) Function Single Operator Two Radios (SO2R) with One IC-PW2



IC-PW2
Promotion Video

Full Power and Full Duty Cycle Operation

The IC-PW2 uses new 65 V LDMOS power transistors and a high efficiency power supply. A 1 kW output at full duty cycle can be achieved with 200 V AC input*. It can be operated at full power as soon as power is turned ON. (* 180–264 V AC required)



Detachable Controller with Color Display

A remote control cable enables the amplifier to be mounted away from the radios for a big station installation, in a small shack space. The 4.3 inch color screen is a touch screen with a graphical user interface. Connected antennas are graphically shown on the display for easy recognition.





Antenna select screen example

Increased Linearity & Clean Transmission


The IC-PW2 has succeeded in realizing the world's first DPD as a linear amplifier for amateur radio in combination with the IC-7610. This technology corrects the signal distortion from the IC-PW2, by applying inverse distortion to the output signal from the IC-7610 exciter in advance*.

* Not applied for non-linear modulation such as FM, FSK and MSK modes.

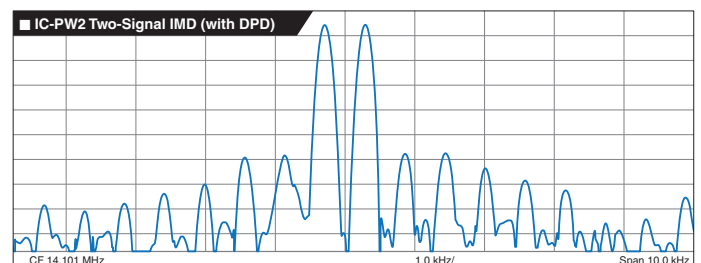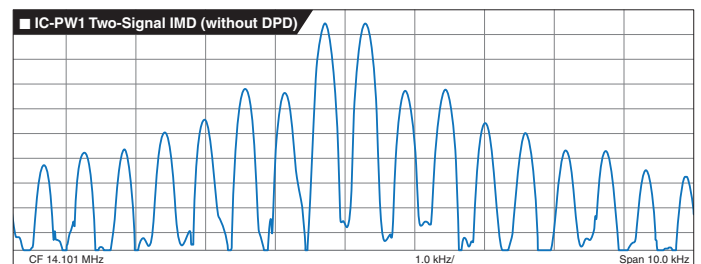

2 x 6 Automatic Antenna Selector

Each antenna can be independently switched when making a band change on either transceiver. You can operate it as if you had two linear amplifiers. Moreover, Single Operator Two Radios (SO2R) operation in a contest can be realized with one IC-PW2. While you are making a call on one radio, you can watch another band on the other radio.

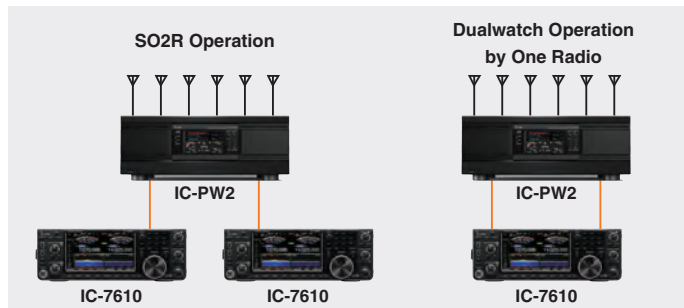

Rx In/Out Connectors for Multi-band BPF

User supplied bandpass filters (BPF), preamps and attenuators can be connected to the [Rx In/Out] connectors. When two radios are used with the IC-PW2, one multi-band BPF can be shared with these radios by switching the receiving radio. In addition, the band switching of multi-band BPF can be controlled from the band data output connector. The [BAND 1], [BAND 2] data output connectors can each be set to either INPUT 1, INPUT 2, transmitter side, or receiver side. They can be linked with band switching of various external devices.

Other Features


- High-efficiency and low noise cooling system
- Various error detection circuits protect internal components
- With current Icom radios, various settings are easy, and you can get the full performance of the IC-PW2
- A LAN port for remote control operation from a PC*
- An SD card slot on the front panel for firmware updates, and so on
- Built-in Automatic Antenna Tuner
- Effortless operation, even when connected to non-Icom radios
- Remote AUX jack for controlling an automatic telescopic antenna
- Antenna quick select function temporarily set to the preset antenna connector such as for using a multi-band antenna or a dummy load
- The Transmitter Lockout function prevents simultaneous transmission of two radios during the SO2R operation.

*Software is in the planning stage.

SPECIFICATIONS

	IC-PW2
Frequency coverage	1.8, 3.5, 7, 10, 14, 18, 21, 24, 28, 50 MHz amateur bands
Output power	1 kW (180–264 V AC), 500 W (90–132 V AC)
Driving power	Max. 100 W (Icom 100 W HF transceivers)
Power supply requirement	90–132 V AC (50/60 Hz), 180–264 V AC (50/60 Hz)
Spurious emissions	Less than -60/-70 dB (HF bands/50 MHz)
Input impedance	50 Ω
Matching impedance range	16.7–150.0 Ω
Tuning accuracy	VSWR 1.5 : 1 or less
Usable temperature range	-10°C to +40°C, +14°F to +104°F
Dimensions (Projections not included)	425 (W) × 149 (H) × 445 (D) mm, 16.7 × 5.9 × 17.5 in
Weight (approximate)	21 kg, 46.3 lb

All stated specifications are subject to change without notice or obligation.

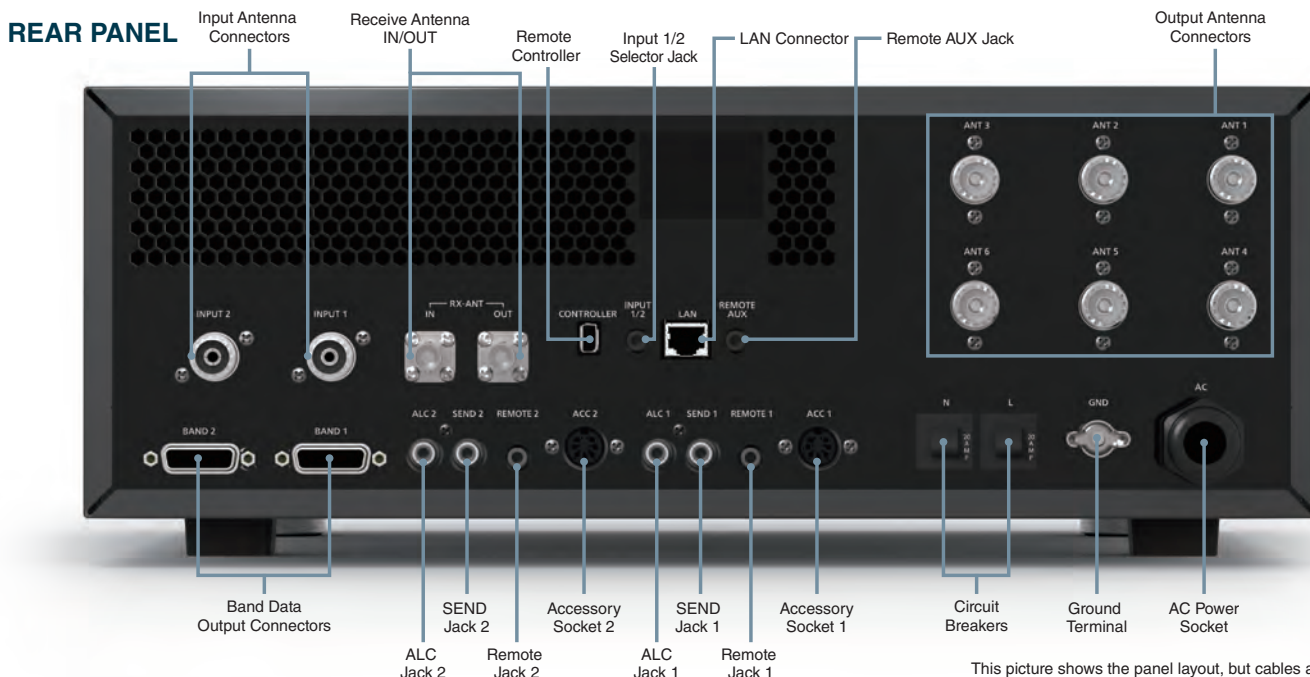

This picture shows the panel layout, but cables are not shown.

All stated features, appearances, screen shots and specifications may be subject to change without notice. Icom and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. All other trademarks are the properties of their respective holders.

Icom Inc.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icomjapan.com

Icom America Inc.
www.icomamerica.com

Icom (Europe) GmbH
www.icomeurope.com

Icom (Australia) Pty. Ltd.
www.icom.net.au

Your local distributor/dealer:

Icom Canada
www.icomcanada.com

Icom Spain S.L.
www.icomspain.com

Shanghai Icom Ltd.
www.bjicom.com

Icom Brazil
E-mail: sales@icombrasil.com

Icom (UK) Ltd.
www.icomuk.co.uk

Icom France s.a.s.
www.icom-france.com