


POST MIXER AMPLIFIER USING 4x J310

ORIGINAL TOROID VERSION (SQUARE)

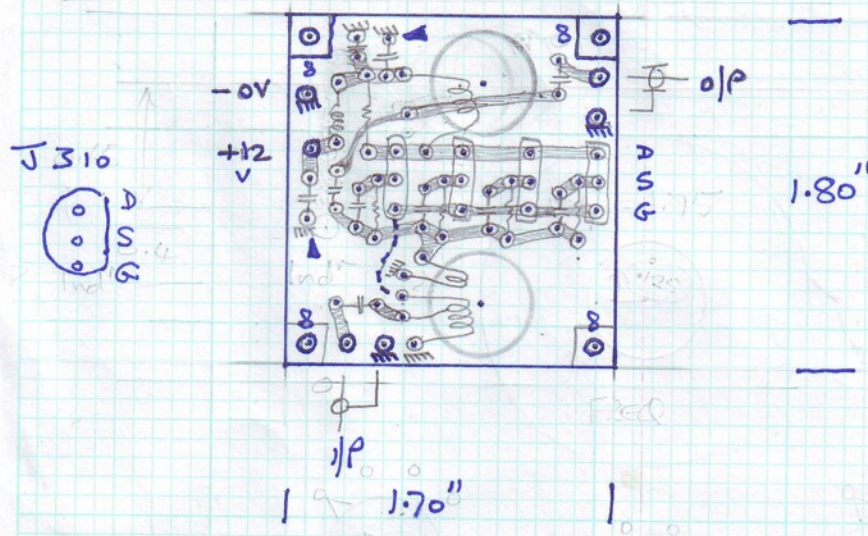

Notes:

- See the PCB symbol document for an explanation of all symbols on these diagrams.
- The above layout uses two FB50-43 toroids.
- Board material in both layouts is 1/16 inch thick double sided copper clad fibreglass.
- Board dimensions are 1.80 inches x 1.70 inches or 46mm x 44mm (rounded up). Check the dimensions of the printed image and change the printing scale if required.
- The layout is shown viewed is the solder side and all areas containing points marked as ground connections should be infilled with ground copper and connected through to the top copper groundplane.
- The top copper in both is a continuous groundplane with small gaps around non-ground component leads.
- Note the top side non-ground link