


DJ-F1T AIRBAND MODIFICATION

03/95 REV. B

1. Turn Power off.
2. Remove the battery pack and antenna.
3. Remove five screws as shown below.
4. Slide the Battery Lock Button as indicated below and hold, then open the unit.
(Be extremely careful as ribbon cables are attached to the unit.)
5. Locate and cut the "RED" wire behind the DTMF keyboard.
6. Re-assemble the unit in the reverse order of the above instructions.
7. Reset the CPU by holding the "F" key down while powering on the unit.
8. To change into Airband, press the "B" key. It toggle Airband and 2m amateur band.
9. While you are receiving Airband, the "A" icon will appear on the LCD that indicates the radio detects "AM" signal.

Note: Damage done to the unit while performing the modification will void the warranty.

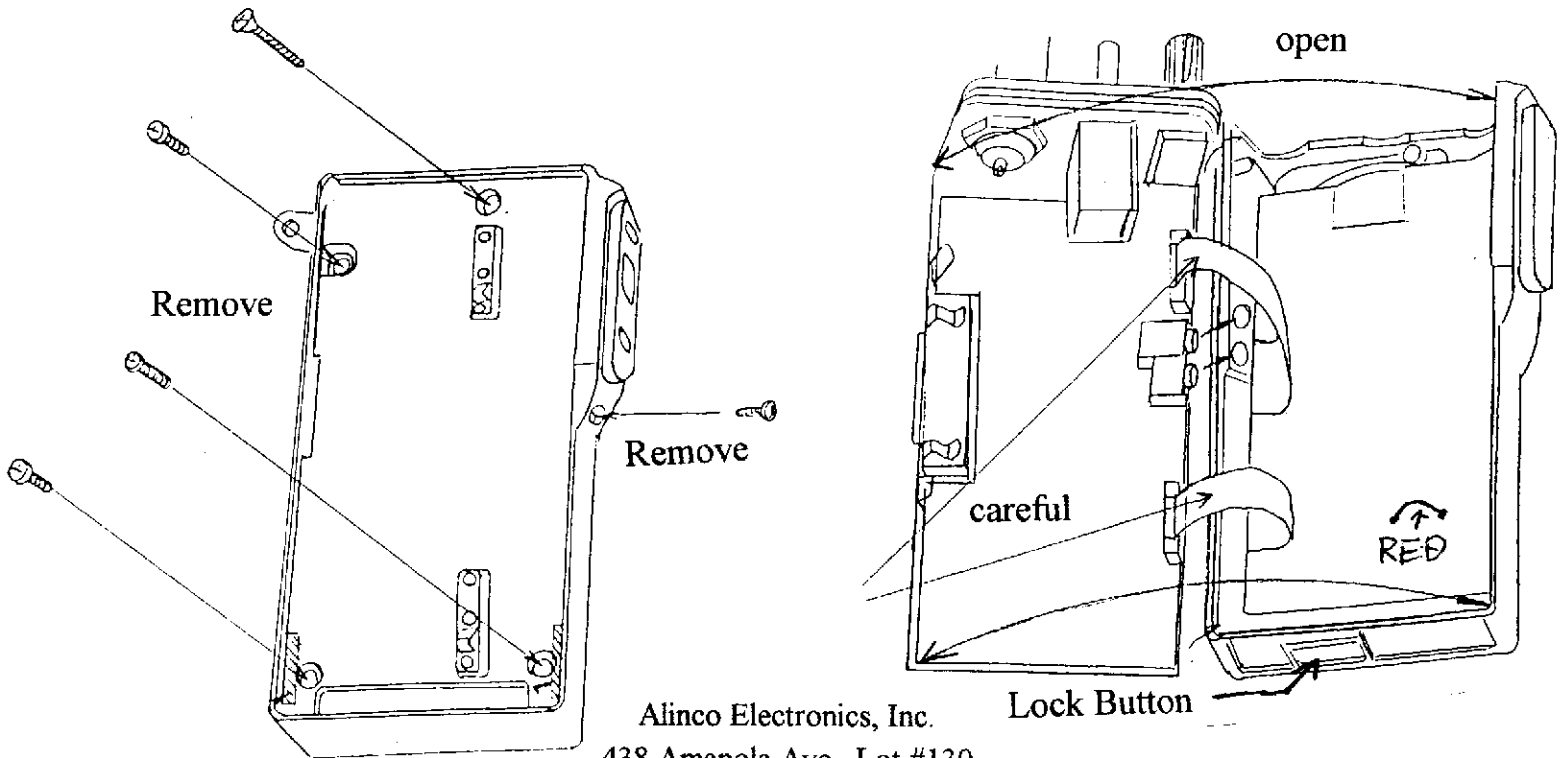

Alinco Electronics, Inc.
438 Amapola Ave., Lot #130
Torrance, CA 90501

Phone: (310) 618-8616 Fax: (310) 618-8758