


The
RigPix
database

YAESU
Class of the World by IY-OP

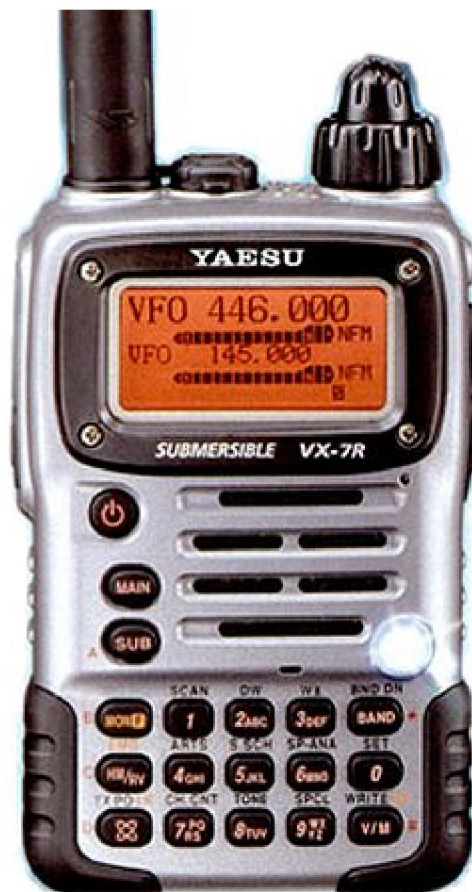

SPECIFICATIONS

Type:	Amateur VHF/UHF transceiver
Frequency range:	TX: 50-54 / 144-146 / 430-440 MHz (Europe) TX: 50-54 / 144-148 / 222-225 / 440-450 MHz (USA) RX: 0.5-999 MHz (Cellular blocked in the US)
Mode:	TX: AM/FM RX: AM/FM/WFM Hi: 5/5/5 W Low3: 2.5/2.5/2.5 W Low2: 1/1/1 W Low1: 0.5/0.5/0.5 W (220 MHz, FM), 1 W (50 MHz, AM)
RF Power output:	
Receiver system:	N/A
Sensitivity:	N/A
Selectivity:	N/A
Image rejection:	N/A
Voltage:	7.2 VDC (internal), 10-16 VDC (external)
Current drain:	RX: 25-200 mA TX: 0.6-1.8 A
Impedance:	50 ohms, SMA
Dimensions (W*H*D):	60*90*28 mm
Weight:	250 gr
Manufactured:	2002-200x
Other:	500 memories. Waterproof/submersible. Twin RX
Related documents:	User manual (2.5 MB)
Modifications:	

(C) 2000-2010
by SMOOFV