



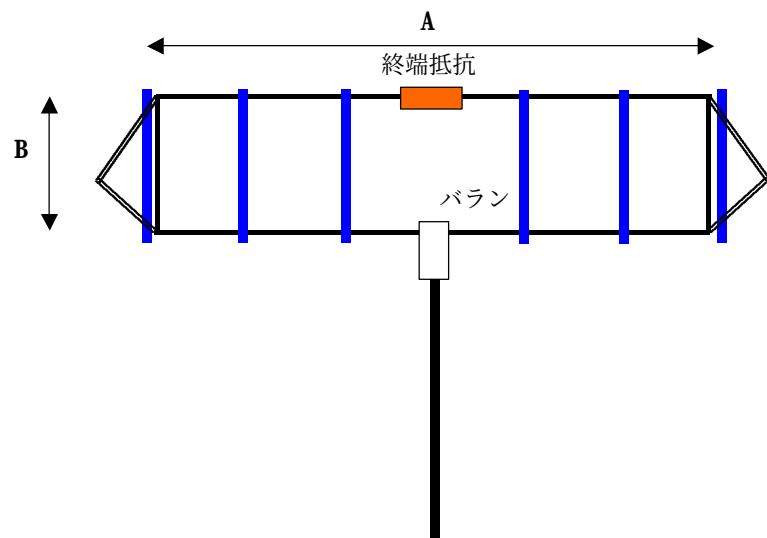

線径 1.4mm 終端抵抗 1080Ω
 A(m) 可変 バラン 16:01
 B(m) 0.512m

周波数特性 SWR @800Ω

Aの長さ	23.8m	11.9m	10m	8.0m	5.95m	2.97m
7010	1.89	1.17	1.19	1.26	1.32	1.38
7050	1.89	1.17	1.19	1.25	1.32	1.38
10110	1.63	1.52	1.34	1.26	1.31	1.42
10130	1.62	1.53	1.34	1.26	1.31	1.42
14050	1.43	1.86	1.74	1.48	1.34	1.45
14200	1.42	1.86	1.75	1.49	1.34	1.45
18080	1.83	1.73	1.83	1.77	1.48	1.48
18120	1.84	1.73	1.83	1.77	1.48	1.48
21050	1.97	1.67	1.75	1.84	1.63	1.49
21200	1.96	1.67	1.74	1.84	1.63	1.49
24900	1.74	1.67	1.69	1.77	1.79	1.49
24940	1.74	1.67	1.69	1.77	1.79	1.49
28050	1.57	1.64	1.71	1.73	1.83	1.48
28500	1.58	1.63	1.71	1.72	1.83	1.47
29000	1.61	1.61	1.72	1.72	1.83	1.47

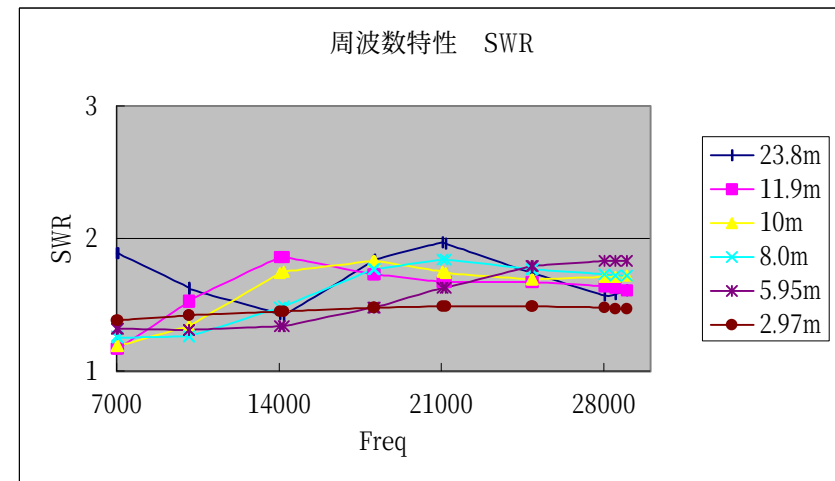

周波数特性 Gain (dBi)

Aの長さ	23.8m	11.9m	10m	8.0m	5.95m	2.97m
7010	-2.97	-11.82	-14.41	-17.71	-21.90	-31.85
7050	-2.92	-11.73	-14.31	-17.61	-21.81	-31.75
10110	-1.11	-6.43	-8.69	-11.75	-15.81	-25.62
10130	-1.11	-6.40	-8.67	-11.72	-15.77	-25.58
14050	-0.74	-2.68	-4.46	-7.07	-10.72	-20.10
14200	-0.75	-2.58	-4.33	-6.93	-10.56	-19.92
18080	-2.46	-0.87	-1.87	-4.01	-7.29	-16.07
18120	-2.39	-0.86	-1.85	-3.99	-7.26	-16.04
21050	0.49	-0.33	-0.83	-2.38	-5.44	-13.75
21200	0.54	-0.31	-0.79	-2.31	-5.36	-13.64
24900	0.47	-0.06	-0.15	-0.95	-3.47	-11.37
24940	0.46	-0.06	-0.14	-0.94	-3.46	-11.35
28050	-0.96	0.05	0.05	-0.29	-2.16	-9.81
28500	-1.41	0.02	0.07	-0.22	-2.00	-9.61
29000	-2.02	-0.01	0.09	-0.15	-1.82	-9.39

