

Coaxial

Power Splitter/Combiner

ZSC-2-1+

2 Way-0° 50Ω 0.1 to 400 MHz




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

Coaxial Connections

SUM PORT	2
PORT 1	1
PORT 2	3

Outline Drawing

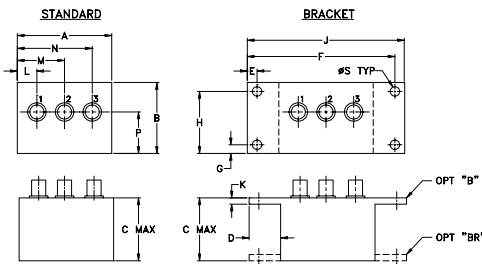

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
2.25	1.38	1.24	.50	.150	3.100	.138	1.238
57.15	35.05	31.50	12.70	3.81	78.74	3.51	31.45

J	K	L	M	N	P	S	wt
3.25	.10	.40	1.15	1.86	.64	.150	grams
82.55	2.54	10.16	29.21	47.24	16.26	3.81	74.0

Features

- wideband, 0.1 to 400 MHz
- low insertion loss, 0.4 dB typ.
- good isolation, 25 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.2 deg. typ.
- rugged shielded case

Applications

- VHF/UHF
- communications systems
- instrumentation

CASE STYLE: M22

Connectors	Model	Price	Qty.
BNC	ZSC-2-1+	\$47.95	(1-9)
BRACKET (OPTION "B")		\$5.00	(1+)
BRACKET (OPTION "BR")		\$1.50	(1+)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
0.1-400	20	15	25	20	25	20	0.2	0.5	0.4	0.75	0.6	1.0	2	3	4	0.15	0.2	0.3

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
0.10	3.07	3.06	0.00	25.99	0.01	1.09	1.19	1.19
0.40	3.08	3.07	0.01	27.93	0.03	1.05	1.12	1.12
1.00	3.08	3.09	0.01	28.33	0.10	1.04	1.11	1.11
10.00	3.10	3.10	0.01	28.28	0.04	1.03	1.10	1.10
28.00	3.14	3.14	0.00	27.85	0.03	1.02	1.09	1.09
46.00	3.15	3.16	0.01	27.49	0.05	1.02	1.09	1.09
64.00	3.16	3.15	0.01	27.21	0.09	1.02	1.10	1.10
82.00	3.19	3.18	0.01	26.92	0.02	1.01	1.10	1.10
100.00	3.18	3.19	0.01	26.73	0.04	1.01	1.10	1.10
160.00	3.26	3.23	0.02	26.24	0.20	1.03	1.12	1.12
220.00	3.29	3.28	0.02	26.21	0.17	1.06	1.15	1.16
265.00	3.41	3.38	0.03	26.64	0.20	1.09	1.18	1.19
310.00	3.38	3.35	0.03	27.01	0.27	1.13	1.22	1.23
355.00	3.42	3.39	0.03	26.87	0.16	1.19	1.26	1.28
400.00	3.70	3.64	0.06	25.70	0.13	1.26	1.30	1.32

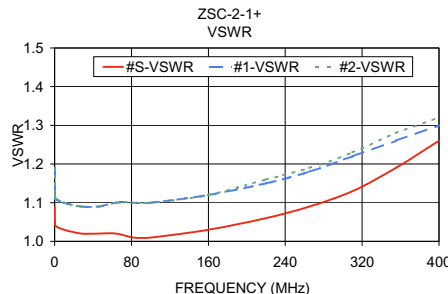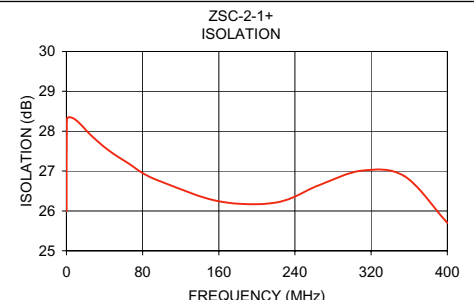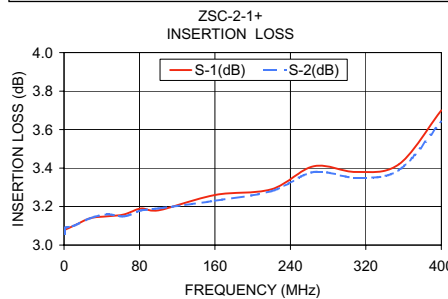

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. B
M108294
ZSC-2-1+
HY/TD/CP
070618