


TO PC SERIAL PORT

PIN 4 = CW OUTPUT, CT PROGRAM


TO TRANSCEIVER KEY INPUT

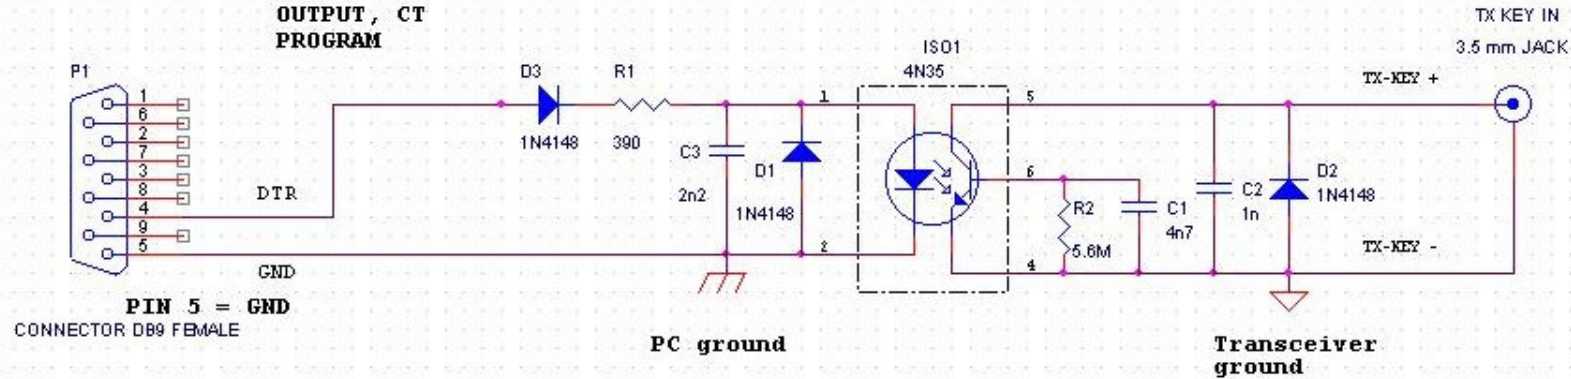

PIN 5 = GND
CONNECTOR DB9 FEMALE

PC ground

Transceiver ground



NOTE :
ALL RESISTORS 1/4 W

NOTE :
CAPACITORS 40V CERAMIC

**SERIAL
PC KEYS
INTERFACE
BY IV3LZQ
Stefano
Barbanti**

Sunday, September 07, 2003

Title
PC keyer - CT logger interface

Size A Document Number
pckeyser_SER_dwg_00

Rev
02

Date: Sunday, September 07, 2003 Sheet 1 of 1