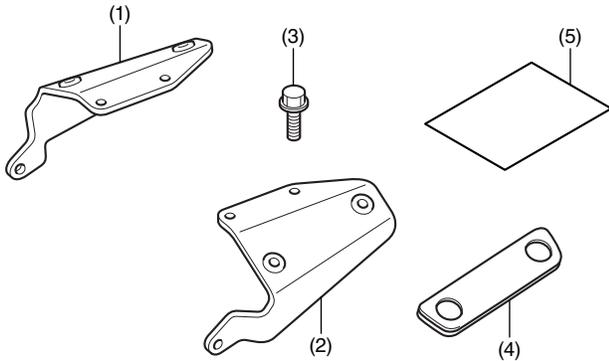


PARTS LIST


No.	Description	Qty
(1)	Right inner support stay	1
(2)	Left inner support stay	1
(3)	8 mm flange bolt	6
(4)	Cushion	2
(5)	Installation Instruction URL	1

TOOLS REQUIRED

Socket (12 mm)

Ratchet

Box-end wrench (12 mm)

Torque wrench

TORQUE CHART


Tighten all screws, bolts, and nuts to their specified torque values. Refer to the Service Manual for the torque values of the removed parts.

Item	N-m	kgf-m	lbf-ft
8 mm flange bolt	27	2.8	20

INSTALLATION
NOTE:


- Take care not to damage the painted surfaces of the motorcycle.
- **Illustration shows CTX700N type, other types are similar.**

1. Refer to the Service Manual for the motorcycle, remove the seat.

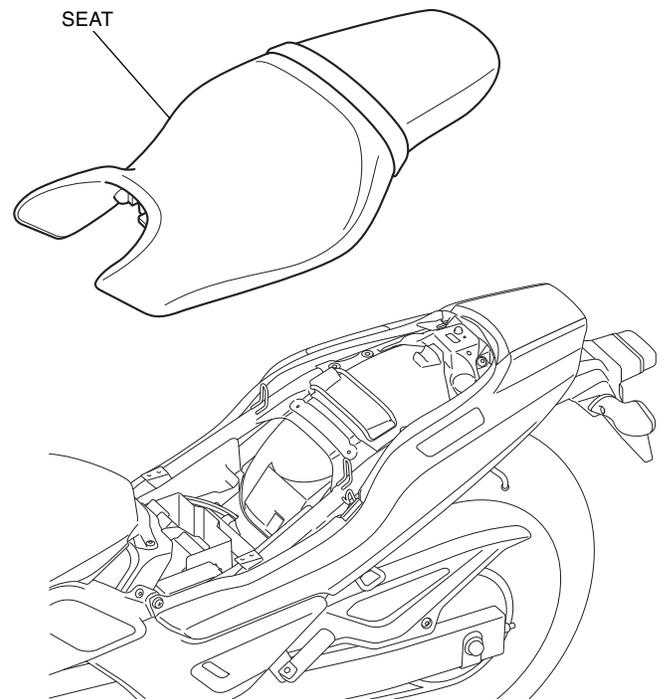


2. Refer to the Service Manual for the motorcycle, remove the rear cowls.

- Repeat on the right side.

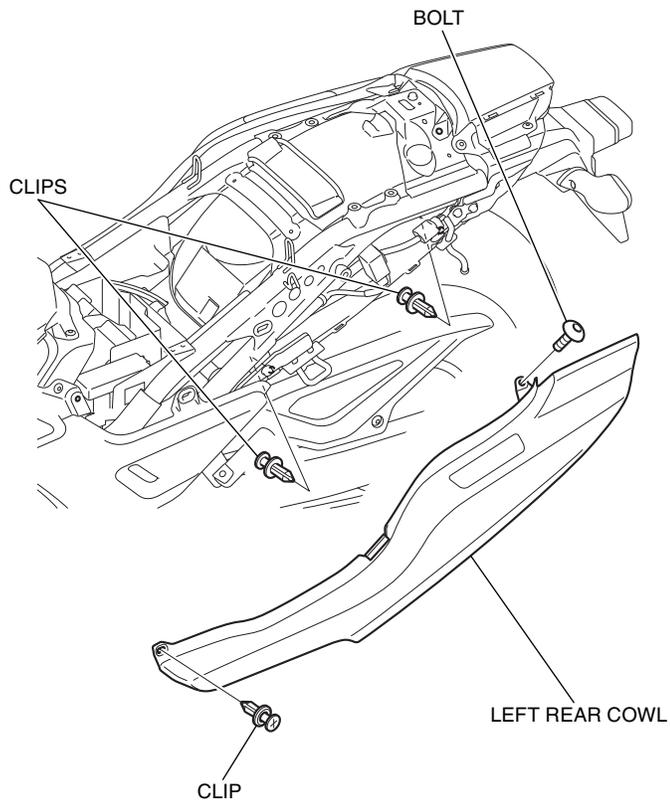


3. Refer to the Service Manual for the motorcycle, remove the covers from the inside of the rear cowls.

- Repeat on the right side.

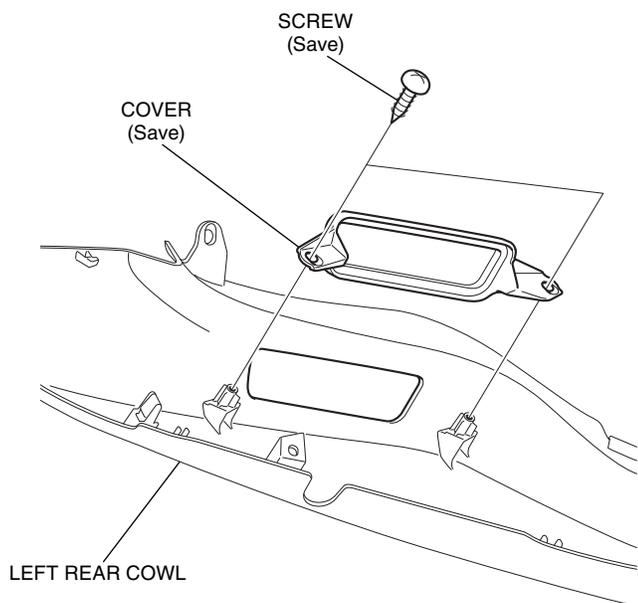

4. Install the inner support stays as shown.

- Repeat on the right side.

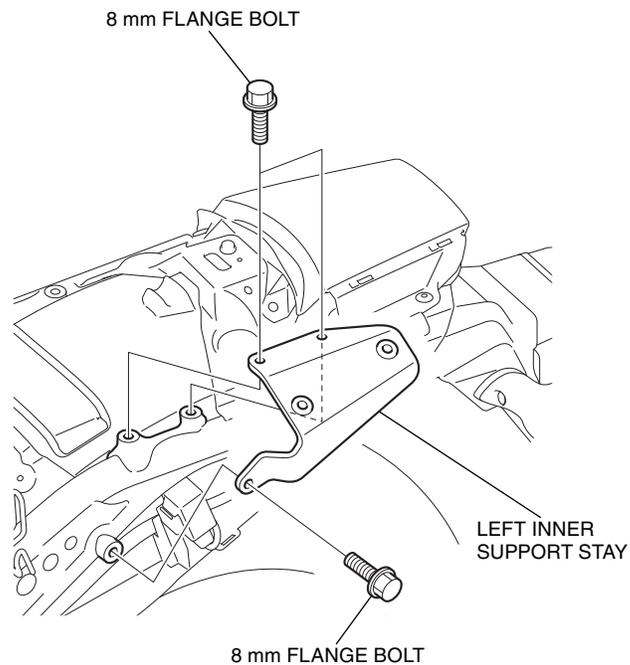

5. Install the motorcycle's parts in the reverse order of removal.

6. Install the cushion as shown.

- Repeat on the right side.

