


Plug-In

Power Splitter/Combiner

2 Way-90° 50Ω 3.5 to 4.5 MHz

PSCQ-2-4+
PSCQ-2-4




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.

Pin Connections

SUM PORT	1
PORT 1 (+90°)	2
PORT 2 (0°)	5
GROUND	3,4,7,8
CASE GROUND	3,4,7,8
50 OHM TERM EXTERNAL	6

Outline Drawing

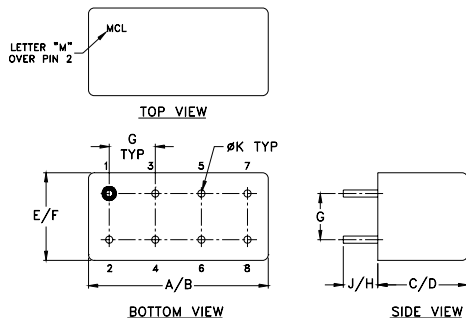

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.385	.400	.370	.400
19.56	20.32	9.78	10.16	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031	grams	
5.08	5.08	3.56	0.79	5.2	

Features

- low insertion loss, 0.1 dB typ.
- good isolation, 30 dB typ.
- excellent VSWR, 1.05:1 typ.
- rugged shielded case

Applications

- modulators
- balanced amplifiers

CASE STYLE: A01

PRICE: \$18.20 ea. QTY. (1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)




The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS (dB) Avg. of Coupled Outputs less 3 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
f_L - f_U	Typ. Min.	Typ. Max.	Max.	Max.
3.5-4.5	36 25	0.4 0.7	3	1.5

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1 S-2						
3.50	3.60 2.66	1.00	41.97	89.65	1.01	1.01	1.02
3.55	3.54 2.71	0.88	41.87	89.63	1.01	1.01	1.02
3.60	3.47 2.77	0.76	41.78	89.66	1.01	1.01	1.02
3.70	3.34 2.88	0.52	41.53	89.64	1.01	1.01	1.02
3.75	3.29 2.94	0.41	41.47	89.63	1.01	1.01	1.02
3.80	3.22 2.99	0.29	41.39	89.64	1.01	1.01	1.02
3.85	3.16 3.05	0.18	41.26	89.61	1.01	1.01	1.02
3.90	3.11 3.11	0.07	41.15	89.62	1.01	1.01	1.02
3.95	3.06 3.16	0.04	41.09	89.62	1.01	1.01	1.02
4.00	3.01 3.22	0.15	40.97	89.64	1.01	1.01	1.02
4.05	2.95 3.28	0.26	40.91	89.61	1.01	1.01	1.02
4.10	2.90 3.33	0.36	40.83	89.61	1.01	1.01	1.02
4.20	2.80 3.44	0.57	40.67	89.62	1.01	1.01	1.01
4.30	2.71 3.48	0.77	40.51	89.62	1.01	1.01	1.01
4.50	2.54 3.70	1.16	40.22	89.60	1.01	1.01	1.01

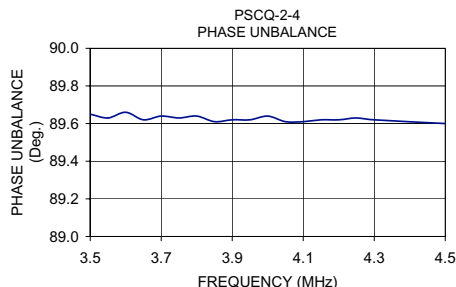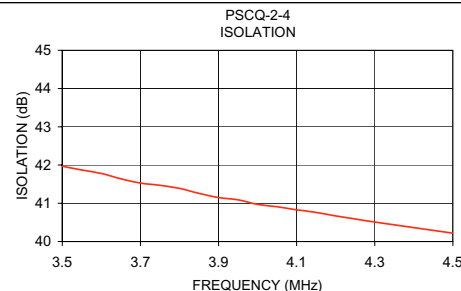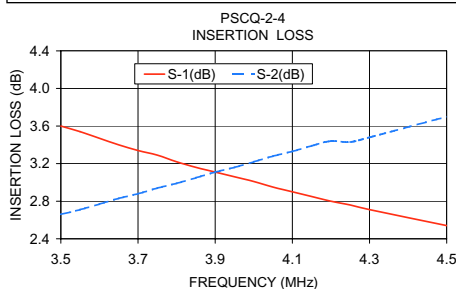

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. A
M98898
PSCQ-2-4
ED-9353
HY/TD/CP
070425