


2SD1879

SILICON DIFFUSED POWER TRANSISTOR

GENERAL DESCRIPTION

High voltage, high-speed switching npn transistors in a plastic envelope with integrated efficiency diode, primarily for use in horizontal deflection circuits of colour television receivers

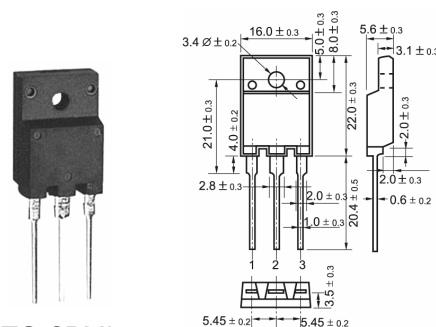

TO-3PML

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
V_{CESM}	Collector-emitter voltage peak value	$V_{BE} = 0V$		1500	V
V_{CEO}	Collector-emitter voltage (open base)			600	V
I_C	Collector current (DC)			6	A
I_{CM}	Collector current peak value			12	A
P_{int}	Total power dissipation	$T_{mb} \leq 25^{\circ}C$		60	W
V_{CESat}	Collector-emitter saturation voltage	$I_C = 5.0A; I_B = 1.0A$		5	V
I_{csat}	Collector saturation current	$f = 16KHz$			A
V_F	Diode forward voltage	$I_F = 5.0A$		1.5	V
t_f	Fall time	$I_C = 4A, I_{B1} = -1/2 I_{B2} = 0.8A, V_{CC} = 100V$		1.0	μs

LIMITING VALUES

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
V_{CESM}	Collector-emitter voltage peak value	$V_{BE} = 0V$		1500	V
V_{CEO}	Collector-emitter voltage (open base)			600	V
V_{FBO}	Emitter-base voltage(open collector)			5	V
I_C	Collector current (DC)			6	A
I_B	Base current (DC)			2	A
I_{BM}	Base current peak value			4	A
P_{tot}	Total power dissipation	$T_{mb} \leq 25^{\circ}C$		60	W
T_{str}	Storage temperature		-55	150	$^{\circ}C$
T_i	Junction temperature			150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
I_{CE}	Collector-emitter cut-off current	$V_{BE} = 0V; V_{CE} = V_{CESmax}$		1.0	mA
I_{CES}		$V_{BE} = 0V; V_{CE} = V_{CESmax}$		2.0	mA
		$T_j = 125^{\circ}C$			
$V_{CEOsust}$	Collector-emitter sustaining voltage	$I_B = 0A; I_C = 100mA$			V
		$L = 25mH$			
V_{CEsat}	Collector-emitter saturation voltages	$I_C = 5.0A; I_B = 1.0A$		5.0	V
V_{BEsat}	Base-emitter saturation voltage	$I_C = 5.0A; I_B = 1.0A$		1.5	V
h_{FE}	DC current gain	$I_C = 1.0A; V_{CE} = 5V$	8	30	
V_F	Diode forward voltage	$I_F = 5.0A$		1.5	V
f_T	Transition frequency at $f = 1MHz$	$I_C = 0.1A; V_{CE} = 10V$	3		MHz
C_c	Collector capacitance at $f = 1MHz$	$V_{CB} = 10V$			pF
t_s	Switching times(16KHz line deflection circuit)	$I_C = 4A, I_{B1} = -1/2 I_{B2} = 0.8A, V_{CC} = 100V$			μs
t_t	Turn-off storage time Turn-off fall time	$I_C = 4A, I_{B1} = -1/2 I_{B2} = 0.8A, V_{CC} = 100V$		1.0	μs

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.