
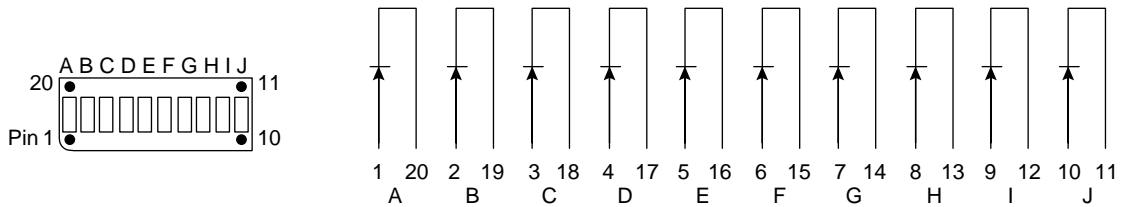


Dimensions (In.)

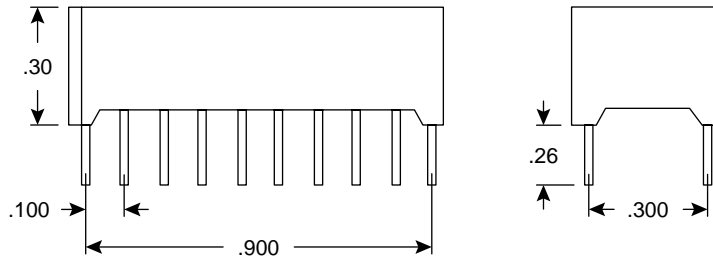

Absolute Maximum Ratings @ Ta=25°C

Parameter	351-2402	351-2403	351-2404
Power Dissipation (mW)	40	85	85
DC Forward Current (mA)	15	30	30
Peak Forward Current (mA)	60	120	120
Reverse Voltage (V)	5	5	5
Operating Temperature Range	-20°~+85°C	-25°~+85°C	-25°~+85°C
Storage Temperature Range			
Lead Solder Temperature .063" below package (case) 260°C for 5 seconds			

Electrical Characteristics (Ta=25°C)

Mouser Stock No.	Dice Material	Emitted Light Color	Lens	Forward Voltage (V)		Reverse Current (µA)	Peak Wavelength (nm)	Luminous Intensity (mcd) Typ
				Typ	Max			
351-2402	GaP	Red	White	2.1	2.6	100	695	.8
351-2403	GaP	Green	White	2.1	2.8	100	570	6.5
351-2404	GaAsP/GaP	Yellow	White	2.0	2.8	100	585	2.4