


L4805-L4885-L4892 L4808-L4810-L4812

VERY LOW DROP VOLTAGE REGULATORS


- INPUT/OUTPUT DROP TYP. 0.4V
- 400mA OUTPUT CURRENT
- LOW QUIESCENT CURRENT
- REVERSE POLARITY PROTECTION
- OVERVOLTAGE PROTECTION (± 60V)
- FOLDBACK CURRENT LIMITING
- THERMAL SHUTDOWN

DESCRIPTION

L4800 series devices are voltage regulators with a very low voltage drop (typically 0.4V at full rated current), output current up to 400mA, low quiescent current and comprehensive on-chip protection. These devices are protected against load dump and field decay transients of \pm 60V, polarity reversal and overheating. A foldback current limiter protects against load short circuits. Available in 5V, 8.5V, 9.2V, 10V and 12V versions (all \pm 4%, T_I = 25°C) these regulators are designed for automotive, industrial and consumer applications where low consumption is particularly important.



In automotive applications the L4805 is ideal for 5V logic supplies because it can operate even when the battery voltage falls below 6V. In battery backup and standby applications the low consumption of these devices extends battery life.

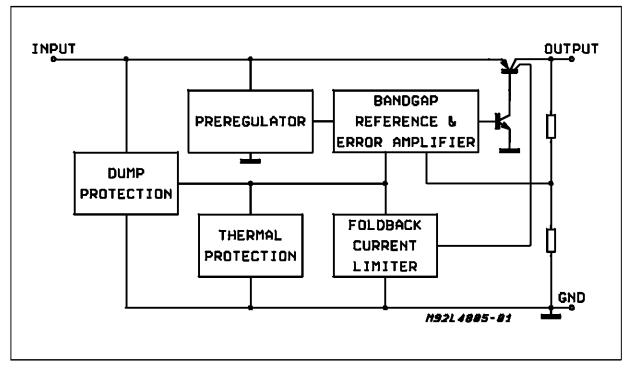

BLOCK DIAGRAM


ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
VI	DC Input Voltage	+ 35	V
	DC Input Reverse Voltage	- 18	V
	Transient Input Overvoltages : Load Dump : $5ms \le T_{rise} \le 10ms$,	60	V
	$ \begin{array}{l} \tau_{f} \mbox{ Fall Time Constant} = 100\mbox{ms}, \\ R_{source} \leq 0.5\Omega \\ \mbox{ Field Decay}: \\ 5\mbox{ms} \leq t_{fall} \leq 10\mbox{ms}, \ R_{source} \leq 10\Omega \end{array} $	- 60	v
	τ_r Rise Time Constant = 33ms		
Tj, T _{stg}	Junction and Storage Temperature Range	- 55 to + 150	°C

THERMAL DATA

Symbol	Parameter	SOT82	TO220	Unit
R _{th j-case}	Thermal Resistance Junction-case Max.	8	4	°C/W
R _{th j-amb}	Thermal Resistance Junction-ambient Max.	100	75	°C/W


PIN CONNECTION (top view)

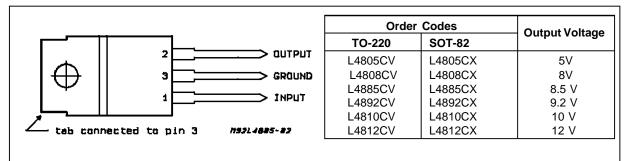

TEST AND APPLICATION CIRCUIT

The output capacitor is required for stability. Though the 100 μ F shown is the minimum recommended value, actual size and type may vary depending upon the application load and temperature range. Capacitor effective series resistance (ESR) also factors in the IC stability. Since ESR varies from one brand to the next, some bench work may be required to determine the minimum capacitor value to use in production. Worst-case is usually determined at the minimum ambient temperature and maximum load expected.

Output capacitors can be increased in size to any desired value above the minimum. One possible purpose of this would be to maintain the output voltages during brief conditions of negative input transients that might be characteristics of a particular system. Capacitors must also be rated at all ambient temperature expected in the system. Many aluminum type electrolytics will freeze at temperatures less than -30 °C, reducing their effective capacitance to zero. To maintain regulator stability down to -40 °C, capacitors rated at that temperature (such as tantalums) must be used.





L4805-L4808-L4885-L4892-L4810-L4812

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Unit
Vo	Output Voltage	I _O = 5mA to 400mA (L4805)	4.80	5.00	5.20	V
		$I_0 = 5mA \text{ to } 400mA \text{ (L4808)}$	7.68	8.00	8.32	V
		I _O = 5mA to 400mA (L4810)	8.16	8.50	8.84	V
		I _O = 5mA to 400mA (L4812)	8.83	9.20	9.57	V
		I _O = 5mA to 400mA (L4885)	9.60	10.00	10.40	V
		I _O = 300mA (L4892)	11.50	12.00	12.50	V
VI	Operating Input Voltage				26	V
$\Delta V_0/V_0$	Line Regulation	$VI = 13 \text{ to } 26V; I_0 = 5mA$		1	10	mV/V
$\Delta V_0/V_0$	Load Regulation	IO = 5 to 400mA*		3	15	mV/V
V _I - V _O	Dropout Voltage	$I_{O} = 400 \text{mA}^{*}$		0.4	0.7	V
		I _O = 150mA		0.2	0.4	V
Iq	Quiescent Current	$I_{O} = OmA$		0.8	2	mA
		I _O = 150mA		25	45	mA
		$I_{O} = 400 \text{mA}^{*}$		65	90	mA
$\frac{\Delta V_{O}}{\Delta T \bullet V_{O}}$	Temperature Output Voltage Drift			0.1		_mV °C∙V
SVR	Supply Voltage Rejection	$I_{O} = 350 \text{mA}; \text{ f} = 320 \text{Hz};$ $C_{O} = 100 \mu\text{F}; V_{I} = V_{O} + 3 \text{V} + 2 \text{V}_{pp}$		60		dB
lo	Max Output Current			800		mA
I _{SC}	Output Short Circuit Current (fold back condition)			350	500	mA

ELECTRICAL CHARACTERISTICS (V_I = 14.4V; $C_O = 100\mu$ F; $T_j = 25^{\circ}C$ unless otherwise specified.)

 * only for L4892 the current test conditions is I_{0} = 300mA

ELECTRICAL CHARACTERISTICS (V_I = 14.4V; C_O = 100μ F; T_j = -40 to 125° C (note 1) unless otherwise specified.)

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Unit
Vo	Output Voltage	I _O = 5mA to 400mA (L4805)	4.70	5.00	5.30	V
		I _O = 5mA to 400mA (L4808)	7.50	8.00	8.50	V
		I _O = 5mA to 400mA (L4810)	8.00	8.50	9.00	V
		I _O = 5mA to 400mA (L4812)	8.65	9.20	9.75	V
		$I_0 = 5mA \text{ to } 400mA \text{ (L4885)}$	9.40	10.00	10.60	V
		I _O = 300mA (L4892)	11.30	12.00	12.70	V
VI	Operating Input Voltage	see note 2			26	V
$\Delta V_0/V_0$	Line Regulation	$VI = 14$ to 26V; $I_0 = 5mA$		2	15	mV/V
$\Delta V_0/V_0$	Load Regulation	IO = 5 to 400mA*		5	25	mV/V
V _I - V _O	Dropout Voltage	$I_{O} = 400 \text{mA}^{*}$		0.5	0.9	V
		I _O = 150mA		0.25	0.5	V
lq	Quiescent Current	$I_{O} = 0 mA$		1.2	3	mA
		I _O = 150mA		40	70	mA
		I _O = 400mA*		80	140	mA
Ιo	Max Output Current			870		mA
I _{SC}	Output Short Circuit Current (fold back condition)			230		mA

Notes : 1. This limits are guaranteed by design, correlation and statistical control on production samples over the indicated temperature and supply voltage ranges.

2. For a DC voltage 26V < Vi < 35V the device is not operating.



Figure 1: Dropout Voltage vs. Output Current




Figure 3: Output Voltage vs. Temperature




Figure 2: Quiescent Current vs. Output Current




Figure 4: Foldback Current Limiting(L4805)





Figure 5: Preregulator for Distributed Supplies

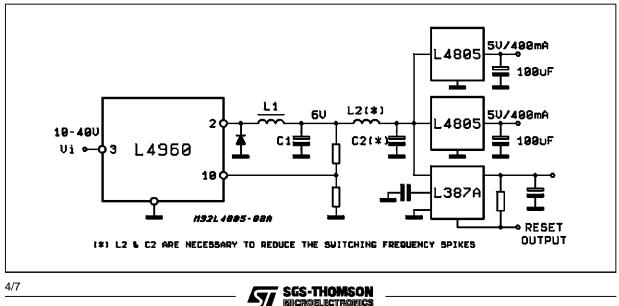


MICROELECTRONICS

0.100

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
А	7.4		7.8	0.291		0.307
В	10.5		10.8	0.413		0.425
b	0.7		0.9	0.028		0.035
b1	0.49		0.75	0.019		0.030
С	2.4		2.7	0.094		0.106
c1		1.2			0.047	
D		15.7			0.618	
е		2.2			0.087	
e3		4.4			0.173	
F		3.8			0.150	

SOT82 PACKAGE MECHANICAL DATA


Н

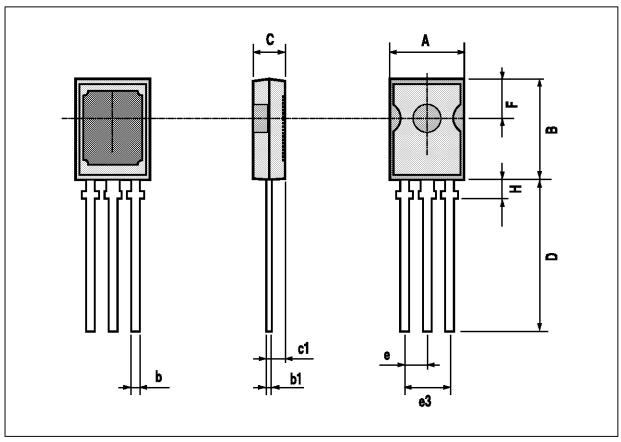

2.54

TO220 PACKAGE MECHANICAL DATA

DIM.		mm			inch	
Dim.	MIN.	TYP.	MAX.	MIN.	ТҮР.	MAX.
А			4.8			0.189
С			1.37			0.054
D	2.4		2.8	0.094		0.110
D1	1.2		1.35	0.047		0.053
E	0.35		0.55	0.014		0.022
F	0.8		1.05	0.031		0.041
F2	1.15		1.4	0.045		0.055
G	4.95	5.08	5.21	0.195	0.200	0.205
H2			10.4			0.409
НЗ	10.05		10.4	0.396		0.409
L2		16.2			0.638	
L3	26.3	26.7	27.1	1.035	1.051	1.067
L5	2.6		3	0.102		0.118
L6	15.1		15.8	0.594		0.622
L7	6		6.6	0.236		0.260
Dia	3.65		3.85	0.144		0.152

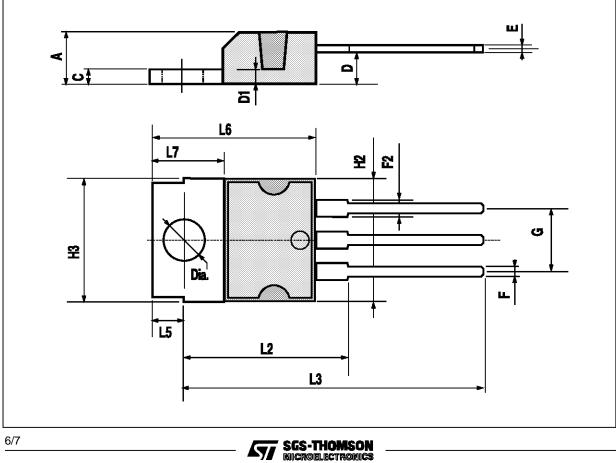

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore -Spain - Sweden - Switzerland - Taiwan - Thaliand - United Kingdom - U.S.A.



This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.