

DMR With DroidStar

Do DMR from an Android Phone

By Dave Mosteller KC3JNW

SETTINGS

1. Enter your call sign
2. Enter your DMR ID
3. ESSID should be a number other than blank for second radio
4. Enter the password you entered in BrandMeister account

18:16 42° 70 64° 4G LTE 69%

Main Settings Log Hosts About

Callsign KC3JNW

DMRID 1142230

ESSID 02

Password ●●●●●●●●

Latitude 0

Longitude 0

Location

Description DroidStar

DMR+ Opts

IAX User

IAX secret

IAX Node

IAX Host


IAX Port 4569

M17/YSF rate Voice Full Voice/Data

Bottom of the Settings Screen

Click “Update Hosts” button

Click “Update ID files” button

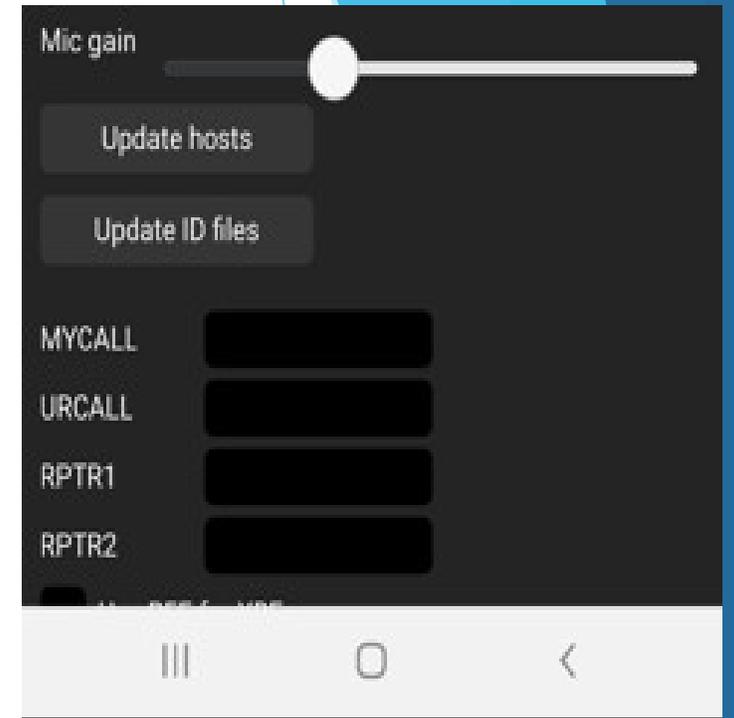

Main Screen

1. Change the Mode to DMR
2. Change the Host to BM_3102_United_States
3. Enter the talkgroup you want to go to
4. Press the Connect button
5. Press the big blue button and speak

